



Angled Steel Posts for Chainlink Fencing | ste

Procter's angled steel posts are manufactured to a high standard, using top quality materials ensures strength and durability. A wide range of standard galvanised are always available from stock.

All our galvanising is to BS EN ISO1461:2009 and our powder coating meets EN13438:2005

Procter's angled steel posts can be powder coated to any standard RAL colour.



Our angled steel posts are used with chain link or welded mesh provides a cost effective method of securing the perimeter of any property. In addition we can supply angled steel posts with cranked tops suitable for three rows of barbed or razor wire to achieve maximum protection.


A full range of chain link, welded mesh and fixings to complement this style of fencing are available from stock.

All our angled steel straining posts come complete with the struts and all the fixings needed to hold and strain the wire.

Available in a straight post or cranked top to accept three rows of barbed or razor wire.



Technical drawings on request

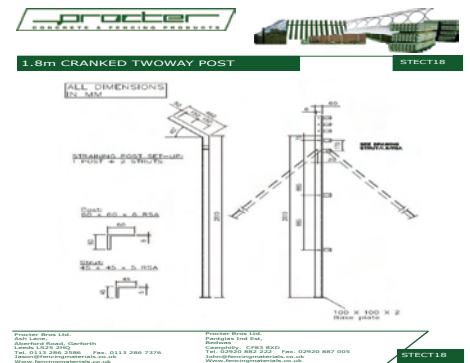

Intermediate					Straining Post					Strut			
Code	Post Length	Fence Height	Section	Weight kg	Code	Post Length	Fence Height	Section	Weight kg	Strut Length	Section	Weight kg	
Straights													
STE12I	1.8m	1.2m	40mm x 40mm x 5mm	5.7	STE12E/C/T	1.8m	1.2m	50mm x 50mm x 6mm	8.5	1.8m	40mm x 40mm x 5mm	5.7	
STE15I	2.1m	1.5m	40mm x 40mm x 5mm	6.6	STE15E/C/T	2.1m	1.5m	50mm x 50mm x 6mm	9.9	2.1m	40mm x 40mm x 5mm	6.6	
STE18I	2.4m	1.8m	40mm x 40mm x 5mm	7.5	STE18E/C/T	2.4m	1.8m	50mm x 50mm x 6mm	11.3	2.4m	40mm x 40mm x 5mm	7.5	
STE21I	2.7m	2.1m	40mm x 40mm x 5mm	8.5	STE21E/C/T	2.7m	2.1m	50mm x 50mm x 6mm	12.7	2.7m	40mm x 40mm x 5mm	8.5	
STE24I	3.0m	2.4m	40mm x 40mm x 5mm	9.4	STE24E/C/T	3.0m	2.4m	50mm x 50mm x 6mm	14.2	3.0m	40mm x 40mm x 5mm	9.4	
STE30I	3.75m	3.0m	50mm x 50mm x 6mm	17.7	STE30E/C/T	3.75m	3.0m	60mm x 60mm x 6mm	21.4	3.75m	50mm x 50mm x 6mm	17.7	
Cranked Top													
STE18IC	3.07m	1.8m	40mm x 40mm x 5mm	9.6	STE18EC/CC/TC	3.07m	1.8m	50mm x 50mm x 6mm	14.4	1.8m	40mm x 40mm x 5mm	5.7	
STE24IC	3.66m	2.4m	40mm x 40mm x 5mm	11.5	STE24EC/CC/TC	3.66m	2.4m	50mm x 50mm x 6mm	17.2	2.4m	40mm x 40mm x 5mm	7.5	



